



SSP 30 Submersible Pump

Performance Curves

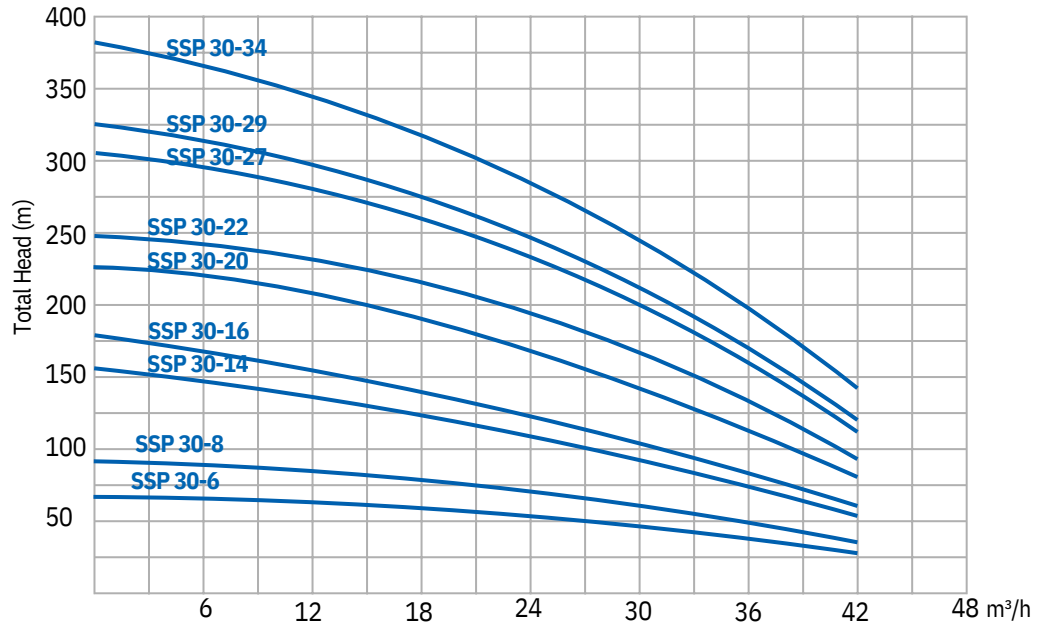

Typical Applications

- Agriculture
- Residential
- Commercial
- Industrial
- Municipal

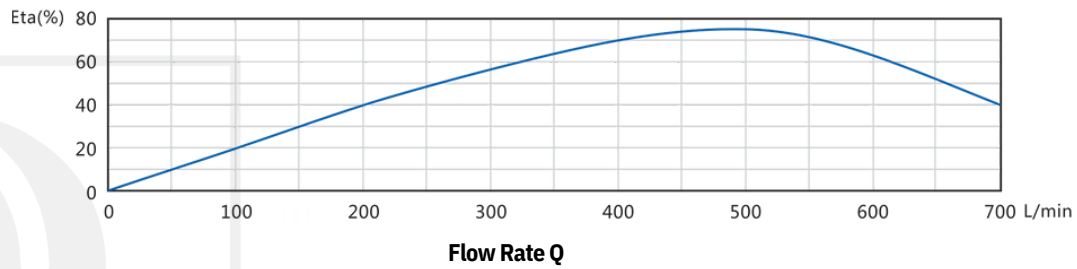

Motor

- Rewindable motor
- Insulation Class B
- Protection IP68
- Speed RPM 2850

Operating Conditions

- Water temperature up to 35°C
- Ambient temperature permissible up to 40°C
- Minimum internal diameter of well- 6"(150mm)
- Maximum sand content- 0.25%
- Maximum immersion depth- 80m

Technical Data

Model	Motor		Full Load Current (A)	Voltage v	Dimensions (mm)				Weight (kg)	Recommended SATTE Controller (kW)
	kW	HP			A	B	C	E		
SSP 30-6	5.5	7.5	12.2	380	1567	765	802	142	65.8	7.5
SSP 30-8	7.5	10	16.5		1750	765	985		74.9	11
SSP 30-14	11	15	28.2		2447	925	1522		103.8	15
SSP 30-16	15	20	28.2		2687	985	1702		114.3	18
SSP 30-20	18.5	25	33		3102	1040	2062		127.9	22
SSP 30-22	22	30	48		3357	1115	2242		140	30
SSP 30-27	26	35	57		3882	1190	2692		157.3	37
SSP 30-29	26	35	65		4062	1190	2872		160.9	37
SSP 30-34	30	40	65		4587	1265	3322		178.2	37

