
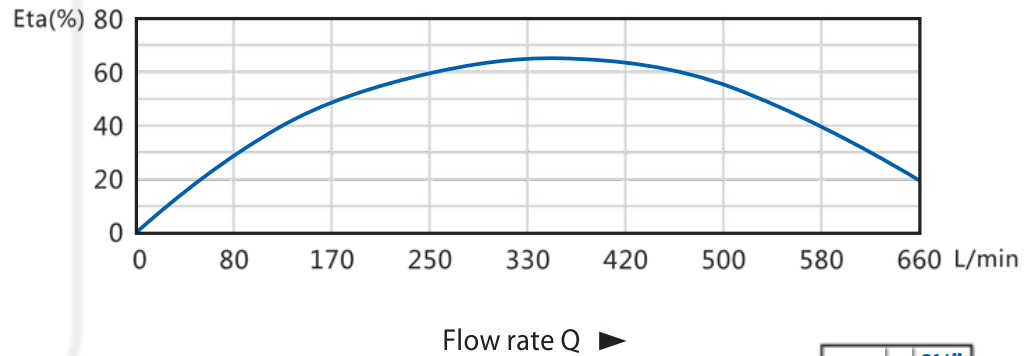


5SSP 25 Deep Well Submersible Performance Curves

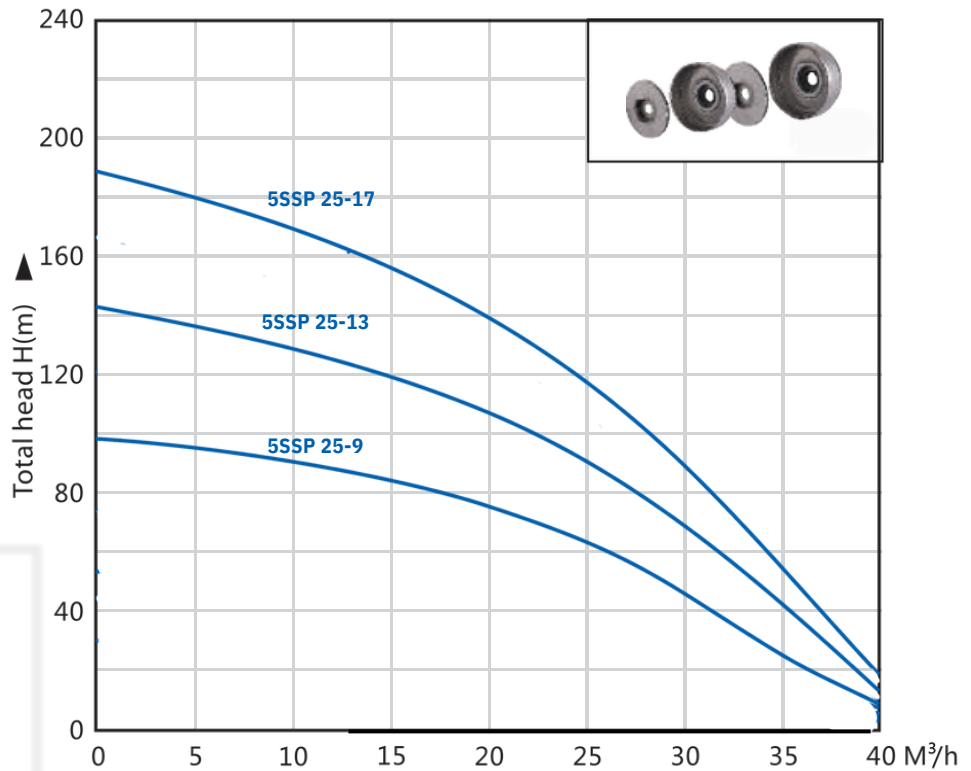

Typical Applications


- Clean water pumping
- Well pumping
- River pumping
- Farm irrigation
- Water supply systems
- Mining operations
- Drainage in breeding industry

Operating Conditions

- **Water temperature up to 35°C**
- **Ambient temperature permissible up to 40°C**
- **5SSP Minimum internal diameter of well: 5"(130mm)**
- **Maximum sand content: 0.25%**
- **Maximum immersion depth: 80m**

Motor

- **Rewindable motor**
- **Insulation Class B**
- **Protection Ip68**
- **Speed RPM -2850**



Technical Data

Model	Motor		Max Current (A)	Voltage V	Dimensions (mm)			Weight (kg)
	kW	HP			C	B	A	
5SSP 25-9	7.5	10	16.5	415	736	655	1367	51.17
5SSP 25-13	11	15	21.2	415	960	740	1765	68.77
5SSP 25-17	15	20	33	415	1072	855	1727	75.37