


## SSWP Deep Well Submersible Pump

### PERFORMANCE CHART

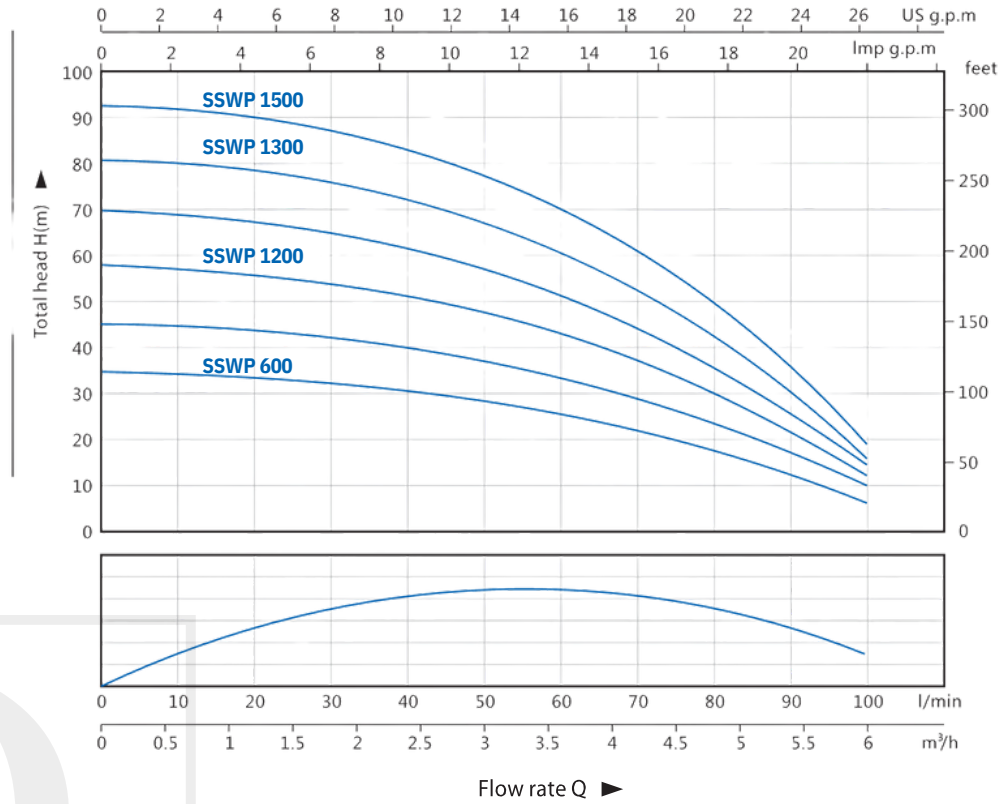

### Typical Applications

- For water supply from wells or reservoirs
- For domestic use, for civil and industrial application
- For Garden use and irrigation

### Operating Conditions

- Maximum fluid temperature up to +35°
- Maximum sand content:0.15%
- Minimum well diameter:130mm

### Motor and Pump

- Renewable motor
- Single-phase:220V/50Hz
- Three-Phase:380V/50Hz
- Equip with start control box or digital auto-control box
- It's available to equip with floating switch
- Curve tolerance according to ISO 9906
- **Enclosure Class:** X8
- **Insulation Class:** B
- **Voltage:** 1x240V
- **Speed:** 2900rpm

### Technical Data

Model	Motor		Max Particle Size, mm	Max Current(A)	Outlet(")	Dimensions (mm)		Weight(kg)
	kW	HP				H	W	
SSWP 600	0.55	0.75	1	5.9	538	538	128	15
SSWP 1200	0.92	1.2		6.5	577	577		18
SSWP 1300	1.3	1.75	1.5	7.5	621	621		21
SSWP 1500	1.5	2	1	8.5	645	645		26